

# COANDA Complete Plant Ro 5C



Complete mechanical wastewater treatment  
for small sewage treatment plants

- Wastewater fine screening
- Grit separation
- Grit classification

## ►► Requirements for a complete mechanical wastewater treatment plant

Manually operated screens and grit traps are no longer sufficient even for small wastewater treatment plants. The increased demands on biological treatment make it necessary to improve the separation performance of mechanical treatment.

- Solid material has to be separated as far as possible and removed. Screens with automatic cleaning and integrated discharge are now required.
- Screenings treatment, such as washing of faecal matter, dewatering and compaction, is required more and more often for economic and hygienic reasons.
- Reliable state-of-the-art grit separation and automatic grit discharge are needed.

## ►► Design and function

A container-mounted ROTAMAT® Micro Strainer removes solid material from the wastewater depending on its bar spacing (e.g.  $e = 2 \text{ mm}$ ). Screenings are removed and transported by a screw conveyor. Inside the closed rising pipe, screenings are dewatered and compacted by an integrated press. Subsequently, they are discharged into a container.


The cleaned wastewater flows by gravity into a COANDA circular grit trap. As the COANDA Tulip is fed through a vortex chamber, the wastewater flow gets a tangential in addition to a radial flow direction. Air is sucked into the vortex and mixed with the waste water flow.

The combination of three effects, namely the COANDA effect, the tea-cup effect and the air intake, guarantee that the organic components are kept on the surface and discharged over a weir while the grit settles in the lower trough area.

The separated grit is removed through a classifying screw, statically dewatered and discharged into a container.

## ►► Benefits of the COANDA compact unit

- Complete mechanical preliminary treatment combined in a single unit
- Small space requirements
- Integrated dewatering and compaction of the screenings; option of screenings washing
- Max. throughput 25 l/s
- High grit removal efficiency
- Made of stainless steel for maximum corrosion protection
- Option of frost-proof design down to  $-25^{\circ}\text{C}$
- Encapsulated, odour-free plant

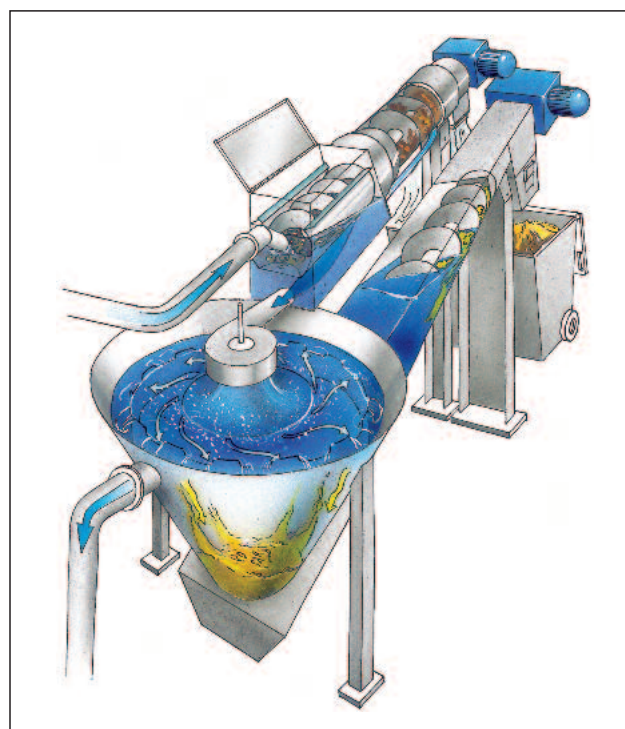

*Schematic drawing of a COANDA Complete Plant Ro 5C*

## HUBER SE

Industriepark Erasbach A1 · D-92334 Berching  
Phone: + 49 - 84 62 - 201 - 0 · Fax: + 49 - 84 62 - 201 - 810  
info@huber.de · Internet: www.huber.de

Subject to technical modification  
1,5 / 3 – 8.2010 – 3.2005

COANDA Complete Plant Ro 5C